




**FRONT VIEW**




**SIDE VIEW**

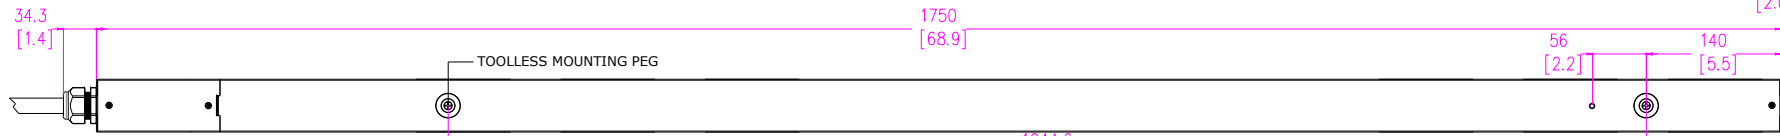

**REAR VIEW**

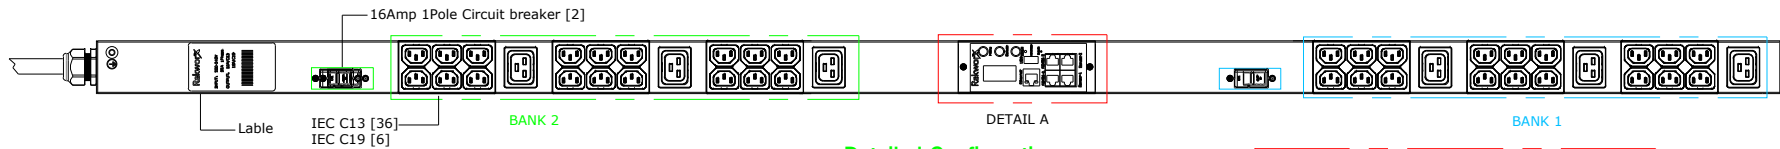

**Detailed Configuration**

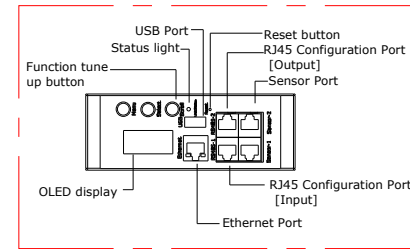

**DETAIL A 1.5:1**

**INPUT CONNECTION:**



**IEC309 3P6H IP44  
32A**

| Config Table      |                   |                   |
|-------------------|-------------------|-------------------|
| Model #           | Power Cord Length | Input Connection  |
| AP5033-360602-30E | 3x10AWG,3M(10ft)  | IEC60309 32A 2P+G |

PDU Series : Metered Input  
 Input : 200-240V AC ,32A ,1Ph, 50/60Hz.  
 Outlet : IEC C13 [36] IEC C19 [6]  
 CB : 16A-1P [2]  
 Bank : 2  
 Case Material: Galvanized steel sheet  
 Case: Black

THIS DRAWING AND SPECIFICATIONS HEREIN ARE THE PROPERTY OF A-RACK AND SHALL NOT BE COPIED, REPRODUCED OR USED IN WHOLE OR IN PART, AS THE BASIS FOR THE MANUFACTURE OR SALE OF ITEMS WITHOUT WRITTEN PERMISSION FROM A-RACK. THIS DRAWING IS BASED UPON LATEST AVAILABLE INFORMATION AND IS SUBJECT TO CHANGE WITHOUT NOTICE.

Drawn by: Darren  
 Approved by: Roger

Description:  
 Metered Input  
 200-240V AC 32A,1Ph 50/60Hz

Drawing No.  
 AP5003-3606



|                |                           |              |
|----------------|---------------------------|--------------|
| Version:<br>A1 | Third Angle<br>Projection | Unit:<br>mm  |
| Scale:<br>1:1  | A4                        | Sheet:1 OF 1 |

Tolerances/Tolerance  
 ISD  
 2768-M

>0.5=3 ±0.1  
 >3=6 ±0.1  
 >6=30 ±0.2  
 >30=120 ±0.3  
 >120=400 ±0.5  
 >400=1000 ±0.8